

Tinuvin[®] 5151

Product Description

Tinuvin 5151 is a liquid blend of a hydrophilic 2-(2-hydroxyphenyl)-benzotriazole UV absorber (UVA) and a basic hindered amine light stabilizer (HALS) designed to fulfill high cost/performance and durability requirements of exterior waterborne and solvent borne industrial and decorative coatings.

Key Features & Benefits

- Synergistic UVA/HALS blend designed for use in water- or solvent-based coatings
- Hydroxy functional UVA can be reacted with isocyanate and melamine crosslinkers to minimize migration
- Excellent spectral coverage in UV region

Chemical Composition

Blend of a hydrophilic 2-(2-hydroxyphenyl)-benzotriazole UVA and a basic HALS

Properties

Typical Properties


Appearance		viscous greenish to light amber liquid
Dynamic Viscosity at 25°C	cps	7,000
Density at 20°C	g/ml	1.10

Miscibility: Tinuvin 5151 is miscible to more than 50% with most commonly used paint solvents. Water solubility is less than 0.01%. Its use in waterborne coatings might require its pre-dilution in a water-miscible co-solvent such as butyldiglycol.

These typical values should not be interpreted as specifications.


UV Absorbance Spectrum

(40 mg/l in chloroform, cell thickness = 1 cm)

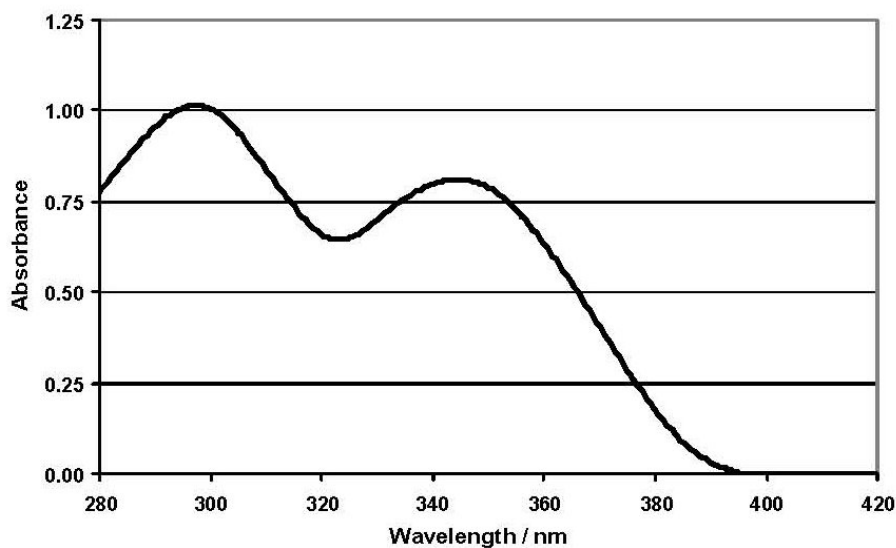

UV Transmission Spectrum

(The theoretical concentration of the UVA in an applied 40 µm clear coat was calculated as a function of the concentration in chloroform ($d = 1.48 \text{ g/cm}^3$) with the help of the Lambert-Beer law)

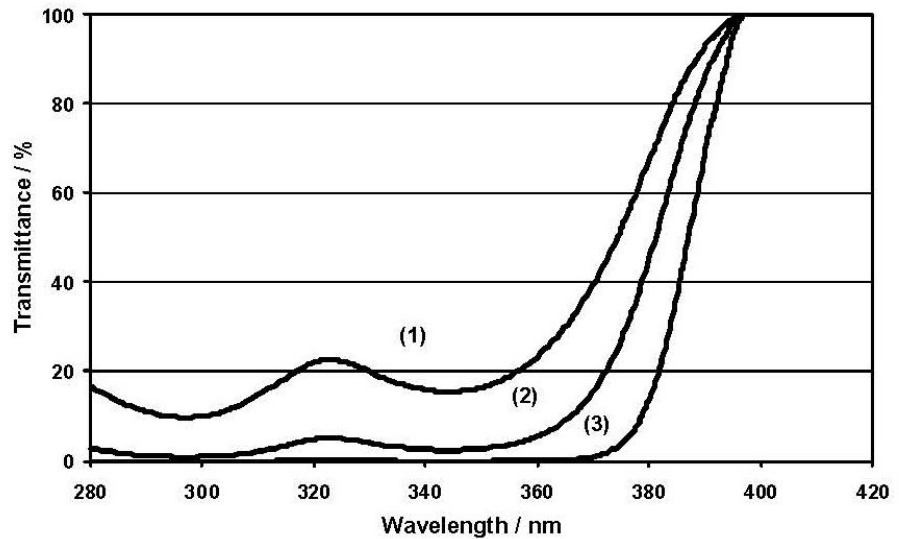

Line one: 0.003% Tinuvin 5151 corresponds to 0.68% active UVA in a 40 µm film
Line two: 0.005% Tinuvin 5151 corresponds to 1.35% active UVA in a 40 µm film
Line three: 0.014% Tinuvin 5151 corresponds to 3.38% active UVA in a 40 µm film

Applications

Tinuvin 5151 is a universal light stabilizer which can be used in a variety of solvent borne and waterborne industrial and decorative coating systems such as:

- Wood stains and varnishes, wood care products, waxes
- General industrial paints
- Heavy duty maintenance and marine coatings
- Architectural coatings (roof tiles, walls, floor coatings)
- Glass and ceramic coatings (architectural glazing, packaging)
- Refinish coatings
- Adhesives and bonding layers
- Exterior construction coatings (roofing, etc.)
- Construction adhesives and sealants

Its use is especially recommended for clear and light pigmented systems like

- Thermoplastics (Acrylics, Vinylics)
- 1 and 2 K-PUR (Acrylic/NCO, PES/NCO)
- Waterborne systems (Acrylic, PUD, 2K-PUR)

The broad UV absorbance of the used UVA of Tinuvin 5151 makes it suitable for a wide range of coatings for wood, plastics, and metal. The synergistic combination imparts superior coating protection against gloss reduction, cracking, blistering, delamination, and color change and provides full substrate protection.

Recommended concentrations

The amount of Tinuvin 5151 required for optimum performance should be determined in laboratory trials covering a concentration range.

The dry film thickness (DFT) directly affects the amount of UVA needed. The following amounts are recommended to achieve proper stabilization for given DFT (light stabilizers % is indicated on total formulation):

10 µm – 20 µm:	8.0 % – 4.0 %
20 µm – 40 µm:	4.0 % – 2.0 %
40 µm – 80 µm:	2.0 % – 1.0 %

Safety

General

The usual safety precautions when handling chemicals must be observed. These include the measure described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care, and wearing of protective goggles.

Safety Data Sheet

All safety information is provided in the Safety Data Sheet for Tinuvin 5151.

Storage

Please refer to the "Handling and Storage of Polymer Dispersions" brochure.

Important

The descriptions, designs, and data contained herein are presented for your guidance only. Because there are many factors under your control which may affect processing or application/use it is necessary for you to make appropriate tests to determine whether the product is suitable for your particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESIGNS, OR DATA MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. IN NO CASE SHALL THE DESCRIPTIONS, DATA OR DESIGNS PROVIDED BE PRESUMED TO BE A PART OF OUR TERMS AND CONDITIONS OF SALE.** Further, you expressly understand and agree that the descriptions, designs, and data furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for same or results obtained from use thereof, all such being given to you and accepted by you at your risk.

Tinuvin is a registered trademark of BASF Group.

© BASF Corporation, 2019



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.

For more information on Responsible Care® go to:

U.S.: www.basf.us/responsiblecare_usa

Canada: www.basf.us/responsiblecare_canada

México: www.basf.us/responsiblecare_mexico

BASF Corporation
Dispersions and Resins
11501 Steele Creek Road
Charlotte, North Carolina 28273
Phone: (800) 251 – 0612
Email: CustCare-Charlotte@basf.com
Email: edtech-info@basf.com
www.basf.us/dpsolutions