

# Tinuvin<sup>®</sup> 5333-DW (N)

## Product Description

Tinuvin 5333-DW (N) is an aqueous dispersion of a blend of UV absorbers (UVA) and a hindered amine light stabilizer (HALS) for coatings, adhesives, sealants, and printing inks. It was also designed to meet high performance and durability requirements of exterior water-based industrial and architectural coatings including energy curable systems (UV, electron beam).

## Key Features & Benefits

- Based on high performance UV absorbers and low basicity amino-ether HALS blend
- Excellent long-term performance (photo permanence)
- Zero VOC product in the final coating product
- Fully preserves dry film properties such as, inherent color, transparency, gloss
- Other coating film properties such as water impermeability and blocking resistance, hardness and scratch resistance are not affected
- Stir-in product, easily mixes with water-based systems without high shear mixing; disperses homogeneously without co-solvents or any other dispersion aids

## Chemical Composition

Proprietary blend of UVA and a non-basic HALS

## Properties

### Typical Properties


Appearance		slightly yellow dispersion
pH		7 – 9
Solids	%	~ 52
Active UVA/HALS stabilizer mix	%	~ 40
Dynamic Viscosity at 20°C (at 150 s <sup>-1</sup> )	cps	10 – 50
Density at 20 °C (68°F)	g/cm <sup>3</sup>	1.03 – 1.07

Tinuvin 5333-DW (N) is miscible with most water-based coating systems.

These typical values should not be interpreted as specifications.


### UV Absorbance Spectrum

(in 80:20 toluene:THF; path = 1cm)

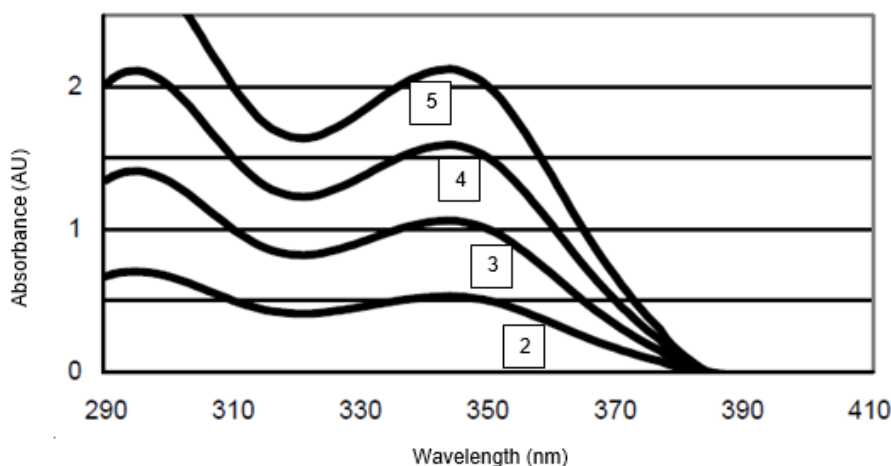

### UV Transmittance Spectrum

(The theoretical concentration in an applied 40 µm clear coat was calculated as a function of the concentration in toluene with the help of the Lambert-Beer law. 80:20 toluene:THF, light path length = 1 cm)

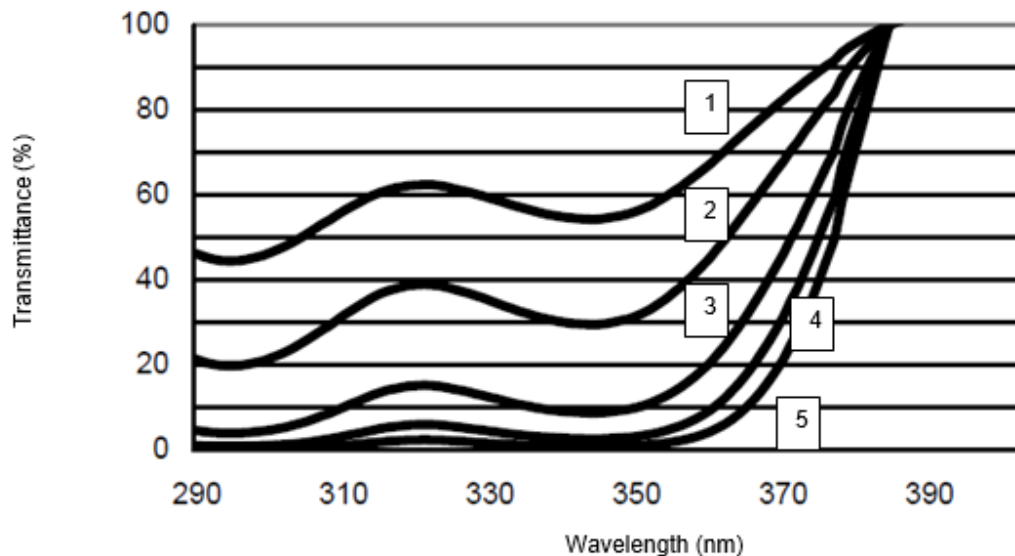

- Line one: 25 mg/l (0.0025% Tinuvin 5333-DW (N) corresponds to 0.25% active in 40 µm film)  
Line two: 50 mg/l (0.0050% Tinuvin 5333-DW (N) corresponds to 0.50% active in 40 µm film)  
Line three: 100 mg/l (0.0100% Tinuvin 5333-DW (N) corresponds to 1.00% active in 40 µm film)  
Line four: 150 mg/l (0.0150% Tinuvin 5333-DW (N) corresponds to 1.50% active in 40 µm film)  
Line five: 200 mg/l (0.0200% Tinuvin 5333-DW (N) corresponds to 2.00% active in 40 µm film)

### Applications

Tinuvin 5333-DW (N) is especially suitable for water-based acrylics and PUD dispersions with low to zero VOC requirement and/or where a traditional 2-(2-hydroxyphenyl)-Benzotriazole UV absorber needs to be upgraded.

Tinuvin 5333-DW (N) is recommended for applications such as:

- Wood coatings such as joinery coatings, stains, deck finishes,
- Vinyl coatings such as displays, PVC liners, tarpaulins, floor tiles
- Plastic coatings such as PC, PMMA, PET, sheets, films, packaging
- Coatings on glass such as architectural glazing, packaging materials
- Architectural coatings
- Overprint varnishes over metal, board, paper, laminates
- Adhesives and sealants

### Binder systems

- Water-based 1K and 2K PUR such as acrylic/NCO, PES/NCO
- Water-based acrylics, acrylic/alkyd hybrids and PUD dispersions
- Water-based thermosetting such as acrylic/melamine, PES/melamine
- Water-based UV curable systems such as acrylic, PES

### Recommended concentrations

The amount of Tinuvin 5333-DW (N) required for optimum performance should be determined in laboratory trials covering a concentration range.

The concentration of Tinuvin 5333-DW (N) depends on dry film thickness (DFT) and on desired protection.

<u>Dry film thickness</u>	<u>By weight on binder solids</u>
10 µm – 20 µm:	40.0 – 20.0%
20 µm – 40 µm:	20.0 – 10.0%
40 µm – 60 µm:	10.0 – 7.5%
60 µm – 80 µm:	7.5 – 5.0%
80 µm – 120 µm:	5.0 – 3.0%

On pale wood substrates (pine, fir, spruce, etc.) pretreatments based on Lignostab® 1198 are recommended for better wood color retention and improved overall durability of coatings.

### Safety

**General**

The usual safety precautions when handling chemicals must be observed. These include the measure described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care, and wearing of protective goggles.

**Safety Data Sheet**

All safety information is provided in the Safety Data Sheet for Tinuvin 5333-DW (N).

---

**Storage**

Please refer to the "Handling and Storage of Polymer Dispersions" brochure.

---

## Important

The descriptions, designs, and data contained herein are presented for your guidance only. Because there are many factors under your control which may affect processing or application/use it is necessary for you to make appropriate tests to determine whether the product is suitable for your particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESIGNS, OR DATA MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. IN NO CASE SHALL THE DESCRIPTIONS, DATA OR DESIGNS PROVIDED BE PRESUMED TO BE A PART OF OUR TERMS AND CONDITIONS OF SALE.** Further, you expressly understand and agree that the descriptions, designs, and data furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for same or results obtained from use thereof, all such being given to you and accepted by you at your risk.

*Tinuvin and Lignostab are registered trademarks of BASF Group.*

© BASF Corporation, 2019



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.  
For more information on Responsible Care® go to:  
U.S.: [www.basf.us/responsiblecare\\_usa](http://www.basf.us/responsiblecare_usa)  
Canada: [www.basf.us/responsiblecare\\_canada](http://www.basf.us/responsiblecare_canada)  
México: [www.basf.us/responsiblecare\\_mexico](http://www.basf.us/responsiblecare_mexico)

BASF Corporation  
Dispersions and Resins  
11501 Steele Creek Road  
Charlotte, North Carolina 28273  
Phone: (800) 251 – 0612  
Email: [CustCare-Charlotte@basf.com](mailto:CustCare-Charlotte@basf.com)  
Email: [edtech-info@basf.com](mailto:edtech-info@basf.com)  
[www.basf.us/dpsolutions](http://www.basf.us/dpsolutions)