

Invented and patented in 1929, **GLYSANTIN**° proudly represents the world's first engine coolant. The brand and its products have continuously evolved to meet the developing needs of powertrain and technology trends while at the same time contributing to a sustainable future. Today, the **GLYSANTIN**° **ELECTRIFIED**° product family provides market-leading solutions with tangible sustainability contributions to current and future mobility concepts.

ELECTROMOBILITY

Mobility solutions are continually evolving and vehicle fleets around the globe are changing. The amount of available powertrain technologies has expanded significantly: Advancements in internal combustion engines (ICE), battery electric vehicles (BEV), fuel cell electric vehicles (FCEV) and hybrid technologies (FHEV, PHEV) lead to a mix of powertrains on the road. This also translates into new requirements for coolant technologies. Continuously rethinking cooling, GLYSANTIN° has developed a portfolio to specifically address the needs of today's and tomorrow's powertrain technologies.

The **GLYSANTIN**° **ELECTRIFIED**° product family addresses the specific requirements of modern mobility concepts and offers premium engine coolants suitable for all current powertrains. While traditional **GLYSANTIN**° products used in ICE are also suitable for hybrid technologies and indirectly cooled BEV, new dedicated products for FCEV and BEV (direct and indirect cooling) have been developed.

GLYSANTIN° FC G20° ELECTRIFIED° is a coolant especially developed for FCEV with a low electrical conductivity.

Compared to non-inhibited glycol/water mixtures, the product

maintains constant low electrical conductivity, securing corrosion protection and the electrical safety of the system.

GLYSANTIN° G22° ELECTRIFIED° is BASF's first premium battery coolant developed specifically for indirectly cooled BEV. The ready-to-use coolant delivers a low electrical conductivity and maintains low and stable currents when exposed to a voltage source. This translates into low fluid decomposition and low generation of hydrogen, making it a safety-optimized product, while ensuring optimal corrosion protection.

Selected products can also be developed as **ECO ELECTRIFIED**° solutions, offering a low product carbon footprint (PCF) derived via the biomass balance approach, or by providing enhanced sustainability profiles via circular economy solutions.




FUEL CELL ELECTRIC VEHICLE




BATTERY ELECTRIC VEHICLE



INTERNAL COMBUSTION ENGINE

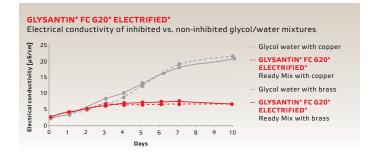

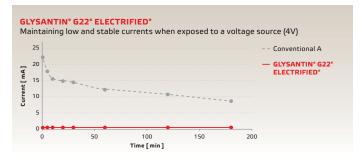

COOL... COOLER... COOOLANT

The GLYSANTIN° G product range is chemically identical with the GLYSANTIN° NA range; GLYSANTIN° NA is used for the North American market

The descriptions, designs, data and information contained herein are presented in good faith, and are based on BASF's current knowledge and experience. They are provided for guidance only, and do not constitute the agreed contractual quality of the product or a part of BASF's terms and conditions of sale. Because many factors may affect processing or application/use of the product, BASF recommends that the reader carry out its own investigations and tests to determine the suitability of a product for its particular purpose prior to use. It is the responsibility of the recipient of product to ensure that any proprietary rights and existing laws and legislation are observed. No warranties of any kind, either expressed or implied, including, but not limited to, warranties of merchatability or fitness for a particular purpose, are made regarding products described or designs, data or information set forth herein, or that the products, descriptions, deals or information may be used without infringing the intellectual property rights of others. Any descriptions, designs, data and information furnished by BASF hereunder are given gratts and BASF assumes no obligation or liability for the descriptions, designs, data or information, data or information given or results obtained, all such being given and accepted at the reader's risk. (05/2023)



