

Rheovis® PU 1190

(Old: DSX® 3290)




We create chemistry

State-of-the-art rheology modifier for building strong pseudo-plasticity in coatings

Rheovis® PU 1190 is a VOC-free¹, odor-free, highly-efficient associative thickener for all types of aqueous paints: premium flat & eggshell, semi-gloss and gloss coatings. It is especially suitable in sprayable paints.

Thickening efficiency in a latex-based clear coat. Rheovis® PU 1190 is 36% more efficient than Rheovis® PU 1191 and over 3 times more efficient than the competitive benchmark.

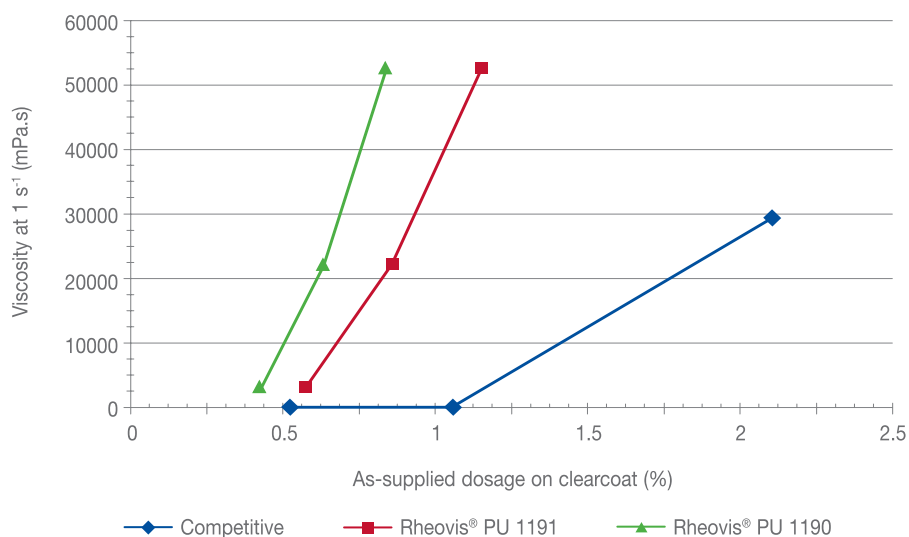

Performance Highlights

- Excellent low shear viscosity builder
- Highly efficient (2-5 times higher efficiency)
- Easy incorporation without high shear mixing
- Excellent sag resistance for thick coatings
- Lower viscosity-drop-on-tinting
- Excellent chemical resistance
- Excellent anti-settling properties
- Universality (architectural & industrial applications)

Sustainability Highlights

- VOC-free acc. to EU 2004/42¹; < 1% VOC acc. to US-EPA Method 24
- APEO-free
- Heavy metal-free (e.g. organic tin compounds)
- Solvent-free
- Odor-free
- 2 to 5 times more efficient

Rheovis® PU 1190: Characteristic Values

Characteristic	Value
Appearance	Opaque viscous liquid
Viscosity	~ 30000 mPa.s
Solids (25°C)	~ 34%
Density (25°C)	~ 1.03 g/ml

¹ VOC content < 0.1% acc. to EU 2004/42 (b.p. >250°C)



Contacts worldwide

Asia

BASF East Asia Regional Headquarters Ltd.
45/F., Jardine House
No. 1 Connaught Place
Central
Hong Kong
formulation-additives-asia@basf.com

Europe

BASF SE
Formulation Additives
67056 Ludwigshafen
Germany
formulation-additives-europe@basf.com

North America

BASF Corporation
11501 Steele Creek Road
Charlotte, NC 28273
USA
formulation-additives-nafta@basf.com

South America

BASF S.A.
Rochaverá - Crystal Tower
Av. das Nações Unidas, 14.171
Morumbi - São Paulo-SP
Brazil
formulation-additives-south-america@basf.com

www.basf.com/formulation-additives

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed.