



JONCRYL® 2990

Superior performance in clear and pigmented concrete coatings at 50 g/L VOC

Key features & benefits

- Applicable in clear and pigmented paint formulations
- Excellent early resistance to water blushing
- Excellent chemical resistance
- Good adhesion to concrete
- Good dirt pick-up resistance
- Resistance to hot-tire pickup
- Capable of 50 g/L VOC

Properties


Appearance	translucent emulsion
Solids Content Weight	45.5%
pH	9.0
Brookfield Viscosity	< 400 cPs
Specific Gravity	ca. 1.04 g/cm ³ ca. 8.68 lbs/gal
Average Particle Size	100 nm
MFFT	ca.18 °C
Freeze-thaw Stable	No

JONCRYL 2990

Superior performance in clear and pigmented concrete coatings at 50 g/L VOC

JONCRYL 2990 is a self-crosslinking, acrylic emulsion polymer for cementitious applications. The latex can be used in clear formulations for “wet look” concrete coatings or pigmented formulations for garage floor coatings. JONCRYL 2990 provides excellent chemical, hot tire pick-up, and weathering resistance. As well as good dirt pick-up, hot tire and blush resistance.

Performance of JONCRYL 2990

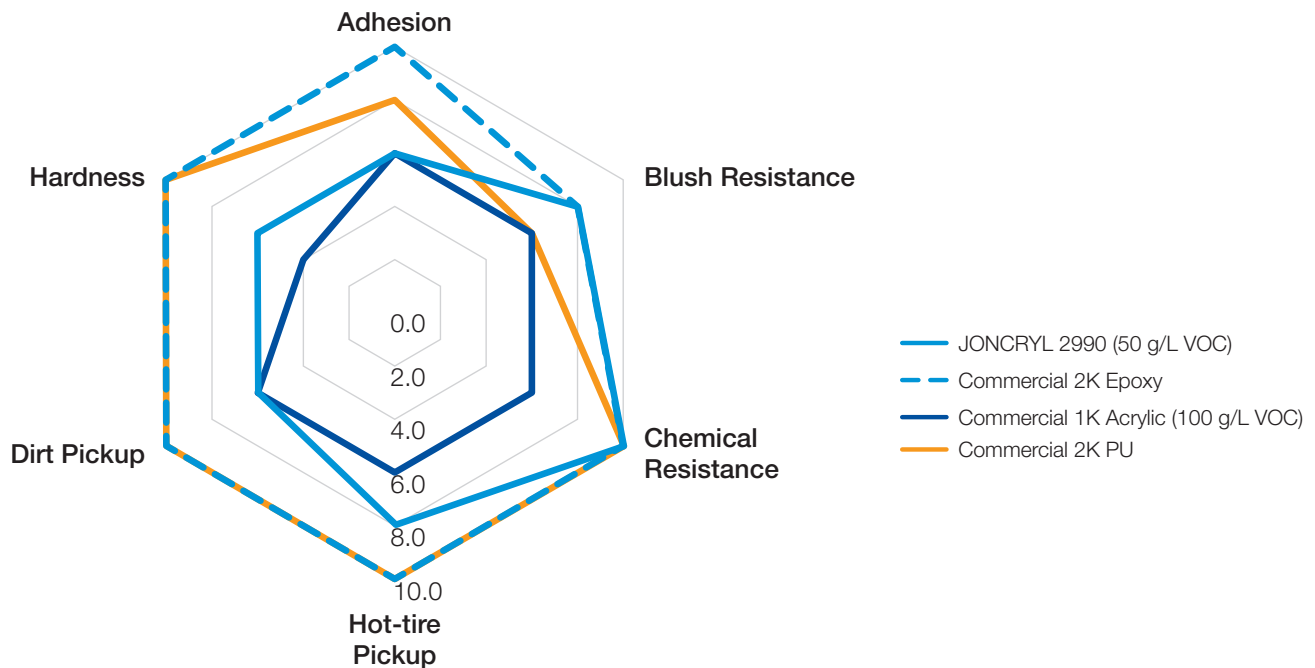

Contacts

Contact us to learn more about JONCRYL 2990 and our full portfolio of concrete coating solutions.

United States and Canada

BASF Corporation
11501 Steele Creek Road
Charlotte, NC 28273
Phone: 800-251-0612
E-mail: dpsolutions@basf.com
Web: www.basf.us/dpsolutions

Mexico

BASF Mexicana, S.A. de C.V. Av. Insurgentes Sur 975
Col. Ciudad de los Deportes 03710
Mexico, D.F.
Phone: 52-55-5325-2600
E-mail: contactoed@basf.com
Web: www.basf.com.mx

BASF Corporation, 2018. Charlotte, NC.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed. (11/2019)

® = Registered trademark of the BASF Group